


COMPUBALLAST®: Best energy saving eBallasts
Electronic Ballasts For 250W MH Lamps.
European Voltage 185 to 265V Energy Miser

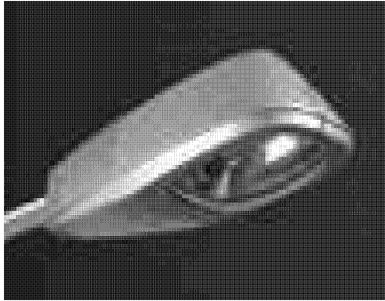

Our MH CompuBallast® - Saves Energy!

Designed to replace electro-magnetic ballasts with advanced Electronic Ballasts and save energy – 20% plus.
The igniter and capacitor eliminated for extra saving.
Our electronic ballasts incorporate the latest IC technology.

This *CBM138250E* Universal Voltage electronic ballast is designed for MH 250W M138 lamp. Compliant with c(UL)us, c(CSA)us and CE standards.

20% Plus Savings

Reliable Product

CBM138250E

Universal Voltage eBallast for *MH M138 250W lamp*

How much can you save? $\Sigma(kWh+maintenance+igniter+...)$

MH electronic ballast for 250W, M138 lamp
Universal Input voltages = 95V to 265V at 50/60Hz
Ballast input = 250W; output = 225W
Lamp Current Crest Factor = 1.55
Ballast factor (BF) = 0.99
Aluminum enclosure 0.04" AWG
Enclosure size = 8.0"L x 4.0"W" x 2.0"H; Wt=1kg.
Constant Lumen output with variations in line voltage
Permits relamping without damage to lamp or ballast

Power Factor > 0.99
THD < 0.05
Energy saving = 20% plus.
(compared with Magnetic)
Type 1 Outdoor - Encapsulated
Extends Lamp Life
Mounting holes = 8.4" apart
No Buzz, No Flicker
Constant Lumen Output

36 Months Limited Replacement Warranty

12/01/2007

we reserve the rights to make changes without prior notice

since 1976

Call us for price quotation & lead times

COMPUCHARGE INC.

Tel: 514-483-4356 Fax: 514-483-5985 E-Mail: info@compucharge.com